

PIONEER SQUARE PARK KIOSK

Project Intent:

To assist in park activation operations and provide a location for park visitors to find information, we are proposing the placement of a kiosk structure for Pioneer Square Park. This kiosk would be moving from Westlake Park, where it has been in use since April 2024, and replace the existing info cart that is used.

Timeline:

Apr 2026 - Review + Approval

Apr 2026 - Site Prep/Mobilization

May 2026 - Operation

Kiosk Design:

The design of the kiosk was prepared by LMN Architects and fabricated by Metis Construction. The design intent was to provide an open, flexible interior space that can be utilized for the variety of activations in park spaces, with an attractive exterior that will read to visitors as a place to seek out information/assistance. The kiosk design was fully reviewed, vetted, and approved by SPR Proview prior to its initial installation.

Design direction and material selection were based on local/historic aesthetics and ability to periodically refinish the structure or iterate on the form depending on performance.

Design/material choices were made with ease of maintenance in mind through minimizing taggable surfaces and breakable elements. Materials are primarily exterior-grade lumber and polycarbonate. This allows for a light structure with high interior/exterior visibility during operation while avoiding failure points experienced in previous installations.

We've avoided breakable glass elements entirely and have minimized the number of operable features that require complex hardware. Windows are effectively opened by unlocking and removing plywood inserts that allow for quick opening/closing and are easily replaced if damage is incurred.



The kiosk's prefabricated base of pressure-treated lumber rests on concrete pavers placed on the corners of the structure to level. Weight is evenly distributed to avoid point pressure on ground surfaces and footing boards are placed around the perimeter to prevent trash or rodent accumulation underneath. No ground attachment/penetration is required.

The current Westlake Park lettering on the eave will be replaced with new lettering for Pioneer Square Park.

Maintenance:

As a feature placed in the park for SPR/ambassador operations, the kiosk will be monitored daily and kept in good repair for the duration of its installation. Design direction was chosen to minimize taggable surfaces and modular fabrication allows for easily replaced elements in case of damage.

DSA/MID staff conduct maintenance of the structure on a rolling basis for cleaning/graffiti issues and has funding in reserve for any needed repair/replacement of material features. The kiosk will receive a paint and stain refresh following its move.

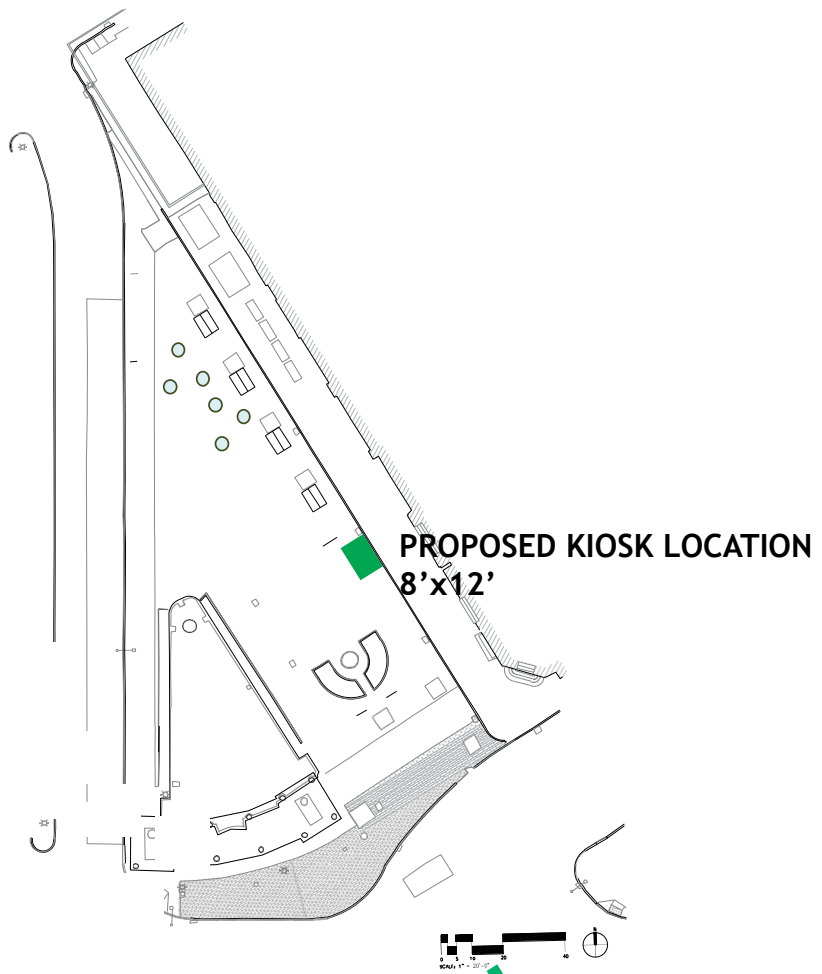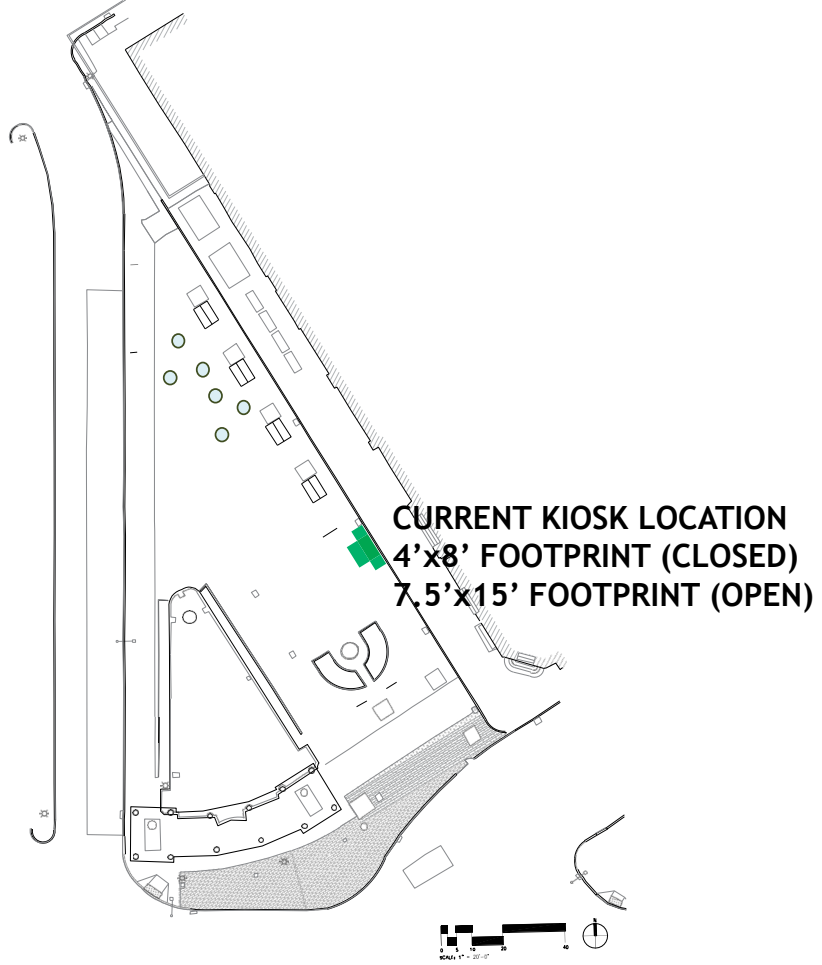





*LETTERING TO BE REPLACED WITH "PIONEER SQUARE PARK"

